


Wall Panel SYSTEMS




PAC-CLAD.COM



PAC-CLAD[®]
P E T E R S E N
A CARLISLE COMPANY

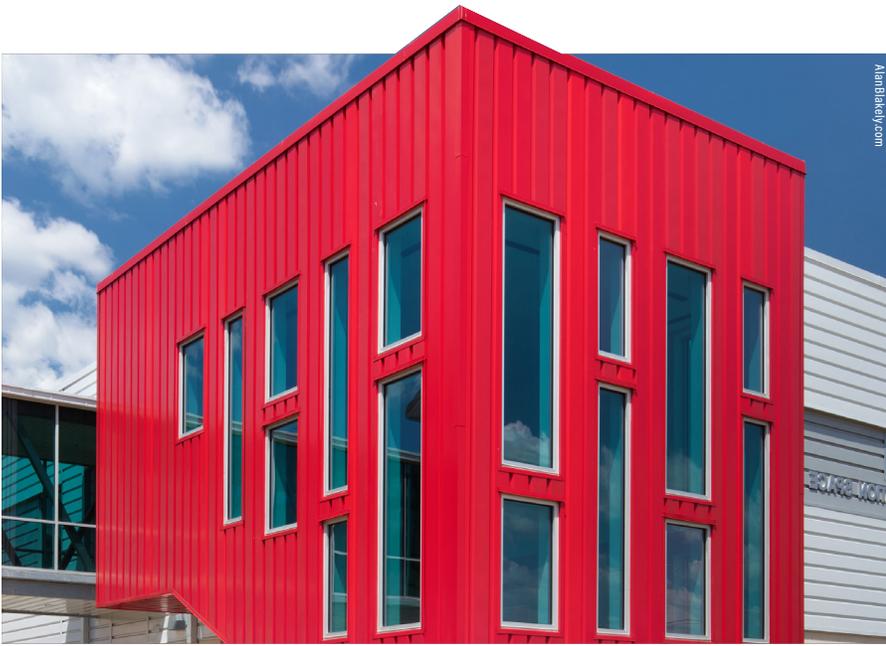

AlanBlakely.com

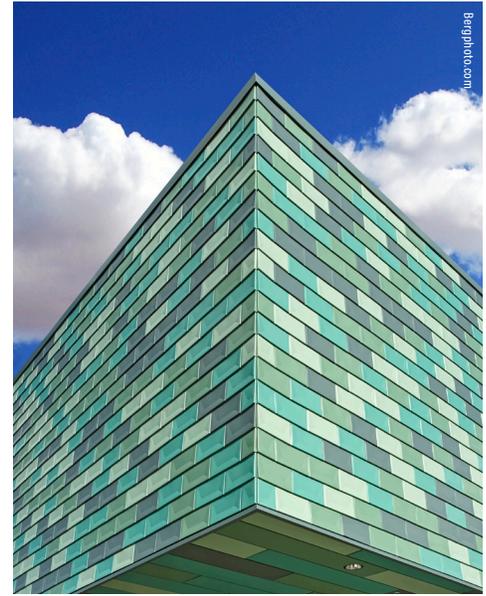

Bergphoto.com


Precision Series HWP, Highline and Box Rib Systems




HWP
WITH OR WITHOUT CLIP



HIGHLINE B1
WITH OR WITHOUT CLIP



HIGHLINE B2
WITH OR WITHOUT CLIP



HIGHLINE C1
WITH OR WITHOUT CLIP




HIGHLINE C2
WITH OR WITHOUT CLIP




HIGHLINE M1
WITH OR WITHOUT CLIP



HIGHLINE S1
WITH OR WITHOUT CLIP
Note: Minimum panel length is 5'



HIGHLINE S2
WITH OR WITHOUT CLIP
Note: Minimum panel length is 5'



BOX RIB 1
WITH OR WITHOUT CLIP



BOX RIB 2
WITH OR WITHOUT CLIP



BOX RIB 3
WITH OR WITHOUT CLIP



BOX RIB 4
WITH OR WITHOUT CLIP



- ▶ Highline S-2 is only available in .050 aluminum and 22 gauge steel
- ▶ No-clip panel, or clip installation for expansion/contraction
- ▶ Aluminum panels may be perforated

- ▶ Micro-seam corners available
- ▶ Multiple rib patterns provide a variety of looks and design options
- ▶ Horizontal or vertical installation


- ▶ Panel depths of 7/8" or 1-3/8"
- ▶ Cost-effective installation
- ▶ Galvalume Plus available

- ▶ Panel lengths: 30' maximum for steel; 22' maximum for aluminum on the thru-fastened leg; longer lengths available on clip panels


Note: Line drawings are not to scale. Oil canning is not a cause for rejection.

Testing Available at PAC-CLAD.com


Flush and Reveal Systems

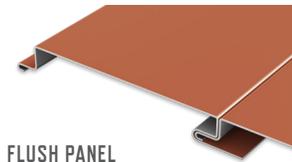

FLUSH PANEL

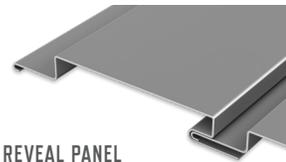

REVEAL PANEL




- ▶ Available with up to two pencil ribs
- ▶ Rounded interlock leg provides improved flush kit
- ▶ 35-year non-prorated finish warranty
- ▶ Optional clips available for Miami-Dade wind resistance requirements
- ▶ Panel lengths from 4' to 25'
- ▶ Galvalume Plus available

Precision Series Tile Systems



CUPPED




FLAT




DIAMOND

- ▶ .032 anodized available
- ▶ Zalmag® coated steel (26 gauge) available (Sold only in Florida and Texas)
- ▶ 35-year non-prorated finish warranty
- ▶ May be used for both wall and roof applications
- ▶ No sealant is required


Exposed Fastener Systems

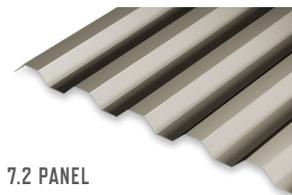


7.2 PANEL




- ▶ 35-year non-prorated finish warranty
- ▶ Matching screws and rivets
- ▶ Closure strips available
- ▶ Precut short lengths (5'-0" minimum) (3'-0" on the M-42)

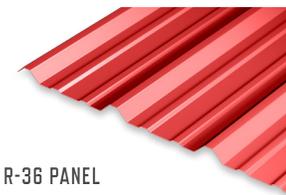

R-36 PANEL



M-42 PANEL*




Note: Made only in Tyler, Texas facility



7/8" CORRUGATED




M-36 PANEL*




*Note: The M-36 and M-42 panels are not intended for use in the construction of metal buildings or structural roof applications. Please consult with Petersen regarding the application of this panel.


1/2" CORRUGATED





Modular AL Metal Wall Panel System

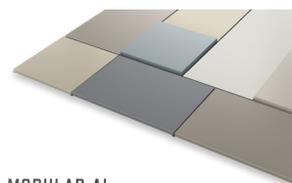

MODULAR AL



DESIGN CONFIGURATIONS

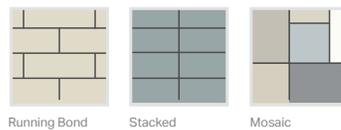

- ▶ Flat or tapered
- ▶ No sealants
- ▶ Concealed fasteners
- ▶ Easy installation
- ▶ Can be perforated
- ▶ Custom Sizes
- ▶ 35-year finish warranty
- ▶ Made of 100% recycled aluminum
- ▶ Full fabrication package on all projects
- ▶ Weep holes for pressure and moisture venting
- ▶ Mix and match panel depths and sizes
- ▶ Stacked and running bond designs available

Field-Assembled Composite Wall Panel Systems

PAC-4000 REVEAL (RV)



REVEAL PROFILE




BATTEN PROFILE

PAC-4000 DEEP REVEAL (DRV)



STANDARD JOINT

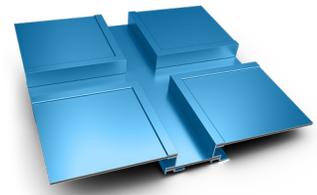

VARIABLE JOINT

- ▶ Performance Testing for Panel and System (including NFPA 285)
- ▶ Fire Resistant
- ▶ Impact Resistant
- ▶ Water Resistant


- ▶ Curvable
- ▶ Easily Cut to Size in the Field
- ▶ Thermal Stability
- ▶ Low Maintenance
- ▶ Quick Lead Time

WARRANTIES


- ▶ Panel Warranty: 10 Years
- ▶ Anodized Finish: 20 Years
- ▶ Kynar 500 Finish: 30 Years (coil-coated)

COMPOSITION


- A. Prefinished Smooth Aluminum Face
- B. Thermoset Phenolic Resin Core
- C. Primed Smooth Aluminum Backer

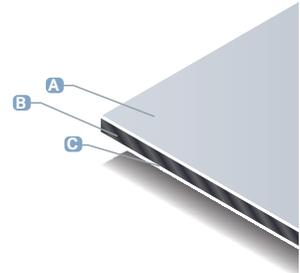


Composite Wall Panel Systems

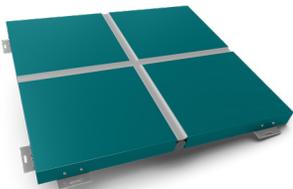

PAC-3000 CS

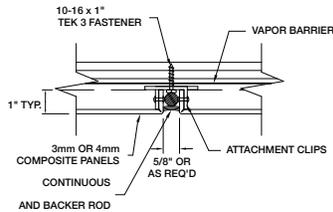

PAC-3000 RS

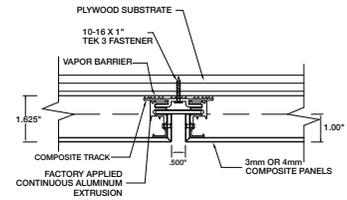


- ▶ Available in a wide variety of non-PAC-CLAD colors and finishes

- ▶ Precise fabrication to meet exacting tolerances

- ▶ Rout-and-return fabrication
- ▶ Welded corners available

Board & Batten Wall Panel Systems

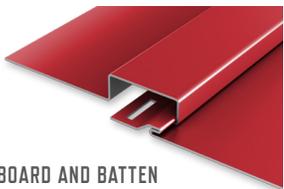


BOARD AND BATTEN



- ▶ Installs with concealed mechanical fasteners through pre-punched holes
- ▶ Vertical wall applications only
- ▶ Widths - 12", 16"
- ▶ Batten is 2" wide and 3/4" deep on all panel widths
- ▶ Maximum length for steel is 30 feet
- ▶ Maximum length for aluminum is 22 feet

Perforated Aluminum Panels & Flat Sheet

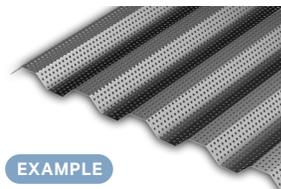

EXAMPLE
PERFORATED 7.2 PANEL

- ▶ Perforation available on select PAC-CLAD aluminum panels and flat sheet
- ▶ Creates contrast, visual interest, and architectural flair
- ▶ Functions for light, air, and sound diffusion
- ▶ Ideal for screens, partitions, decks, guards, and enclosures
- ▶ Wide range of hole sizes and patterns—consult factory for details



1005 Tonne Road
Elk Grove Village, IL 60007
P: 800-PAC-CLAD
F: 800-722-7150

1255 S. Caton, Suite B
Baltimore, MD 21227
P: 800-344-1400
F: 301-953-7627

10551 PAC Road
Tyler, TX 75707
P: 800-441-8661
F: 903-581-8592

102 Northpoint Parkway
Acworth, GA 30102
P: 800-272-4482
F: 770-420-2533

1800 S. 7th Ave., Suite 130
Phoenix, AZ 85007
P: 833-750-1935
F: 602-254-6504

9817 233rd Ave. E., Suite A
Bonney Lake, WA 98391
P: 833-750-1935

